


Dekoratívni podni sistem sa 3D efektom za škole i multifunkcionalne dvorane, sa mješovitom ili kombinovanom elastičnosti prema EN 14904.

SLOJEVI SISTEMA

-  **Boja za linije**
PORPLASTIC X995
-  **Fleksibilni premaz, obojen, mat**
PORPLASTIC S688P
-  **Nosivi sloj sa 3D efektom, bez rastvarača**
PORPLASTIC C524 SKY
-  **Srednji sloj ili sloj za raspodjelu opterećenja**
PORPLASTIC C524/C523 ili
PORPLASTIC L324
-  **Glet sloj**
PORPLASTIC L375
-  **PORPLASTIC osnovna podloga PEL/MEL/CEL**
ljepilo PORPLASTIC B976
 **drvena konstrukcija za CEL (bez slike)**
-  **Prajmer (samo za beton)**
VIASOL EP –P210
-  **Podloga** : beton ili asfalt

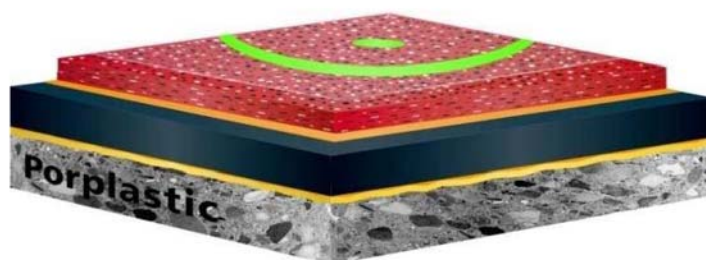

OPIS SISTEMA

- ukupna debljina sistema vidjeti PEL, MEL, CEL
- elastičnost prema DIN V 18032-2 i EN 14904
- nepropustljiv
- odobreno od IHF-a i BWF –a
- bez formidelhida i pentaklorofenola
- trajno elastičan
- dobra otpornost na ogrebotine i adrazije
- za unutrašnje sportske podove
- dekorativan sa 3D efektom
- dostupan u širokoj paleti boja
- lak za čišćenje

PRIMJENA

- sportske dvorane
- školske dvorane
- multifunkcionalne dvorane za rekreaciju



Ovlašteni izvođač:

Tehničko tehnološki biro TENZO d.o.o.

Tel: +387 51 323 680

Kralja Petra II 34b, 78000 Banja Luka, BiH

e-mail: info@tenzo.ba


NANOŠENJE I KORIŠTENJE

slojevi	proizvod	potrošnja (kg/m ²)	debljina (mm)	nanošenje
Boja za linije	PORPLASTIC X995	10 -15 g po metru trčanja	0.1 – 0.2	valjak ili četka
Fleksibilni premaz	PORPLASTIC S688P	0.09 – 0.11	0.05 – 0.1	gumeni gleter i valjak
Nosivi sloj	PORPLASTIC C524 SKY	2.0 – 3.0	2 – 3	zubčasti gleter
<u>Podkonstrukcija</u>	Zavisno od željenje elastičnosti			
Tačkasta elastičnost	PORPLASTIC INDOOR PEL konstrukcija sistema			
Mješovita elastičnost	PORPLASTIC INDOOR MEL konstrukcija sistema			
Kombinovana elastičnost	PORPLASTIC INDOOR CEL konstrukcija sistema			
Podkonstrukcija	Cementi substrat prema standardima, bez pukotina i praznina, nosivi, čvrstoće na prionjivost (pull-off) ≥ 1.0 N/mm ² (EN ISO 4624), zadržane vlage u materijalu < 6% CM.			



MOGUĆNOSTI BOJA

- paleta boja za PORPLASTICSKY
- predivan izgled posutih šljokica
- uključuje 3D efekat dubine

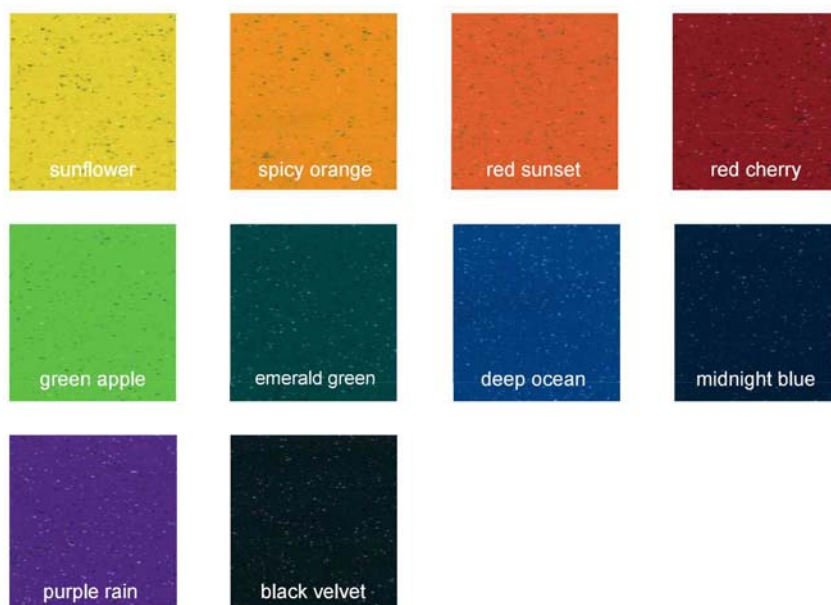

Napomena: za buduće informacije pogledajte tehnički list ili kontaktirajte naš tehnički servis. Svi podaci su u približnim vrijednostima. Kako su svi tehnički listovi popunjavani prema laboratorijskim analizama koje se kontinuirano izvođe, korisnik proizvoda treba da provjeri najnovije protokole –odnosno da kontaktira našu tehničku podršku i website: www.tenzo.ba. Svi tehnički podaci su podložni promjenama bez prethodne najave.

Ovlašteni izvođač:

Tehničko tehnološki biro TENZO d.o.o. Tel: +387 51 323 680

Kralja Petra II 34b, 78000 Banja Luka, BiH e-mail: info@tenzo.ba

www.tenzo.ba